


<b>Model:</b>	AC-BTSC
<b>Engine:</b>	42 KW diesel engine
<b>Control system:</b>	Digital intelligent control system
<b>Air compressor:</b>	0.6 m <sup>3</sup> /min
<b>Glass beads bin:</b>	120 L
<b>Marking width:</b>	10 cm, 12cm,20 cm, 25 cm, 30 cm (optional)
<b>Paint tank capacity:</b>	325 L pressure tank
<b>Marking equipment:</b>	Standard configuration 150 mm; <b>BTSC-I</b> Pneumatic flat line marking shoe, <b>BTSC-II</b> Pneumatic flat or convex line marking shoe.
<b>Marking thickness:</b>	<b>BTSC-I</b> 1.5 mm - 3.2 mm (adjustable); <b>BTSC-II</b> Bottom line 1.0 mm - 2.5 mm (adjustable),convex height 3 mm - 7 mm (adjustable)
<b>Dimensions (L*W*H):</b>	5950 mm × 2200 mm × 2200 mm

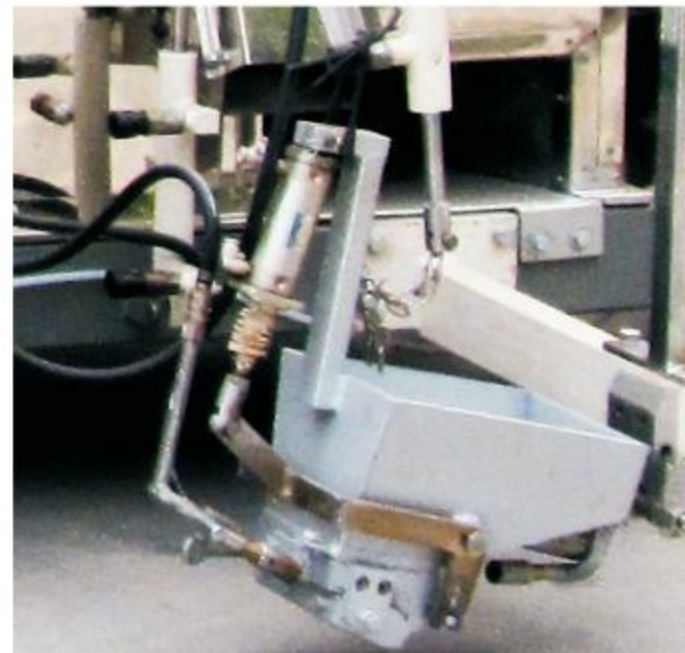

## AC-BTSC

**Big-size Driving Thermoplastic Screeding Road Marking Machine**